

Enquiry    Ordering

Company stamp/signature: \_\_\_\_\_

Customer number: \_\_\_\_\_

Contact person: \_\_\_\_\_

Telephone: \_\_\_\_\_

Offer number: \_\_\_\_\_

Commission: \_\_\_\_\_

Postcode mounting location: \_\_\_\_\_



Standard snow load:  65 kg/m<sup>2</sup>    85 kg/m<sup>2</sup>    125 kg/m<sup>2</sup>    160 kg/m<sup>2</sup>    230 kg/m<sup>2</sup>    350 kg/m<sup>2</sup>

Dimensions:    Width outer edge support: \_\_\_\_\_    Depth outer edge support: \_\_\_\_\_

Height upper edge wall connection: \_\_\_\_\_    Height lower edge eave: \_\_\_\_\_    (Height including floor recess!)

Number of roof sections: \_\_\_\_\_ (Maximum width of 1,000 mm/roof section!)




Colour:     RAL \_\_\_\_\_     Special colour: \_\_\_\_\_     Pre-anodization

Support feet:      Amount \_\_\_\_\_      Amount \_\_\_\_\_

Number of supports: \_\_\_\_\_    Support extension \_\_\_\_\_ mm  
(for adaptation of the support length on the construction site)

Glazing designed for:     8 mm     10 mm     12 mmFillings/multi-skin sheets for:     16 mm     24 mmGlazing bars for division of the glass:     yes     noCollecting channel design:     square     round**Drainage:**

Set 1  
(A second downpipe  
is recommended  
for a roof surface area of 20 m<sup>2</sup> or more!)

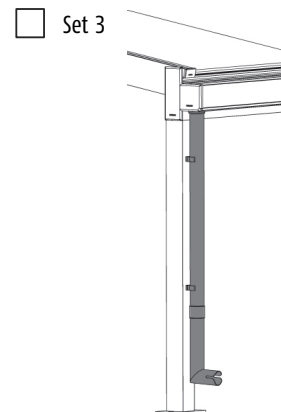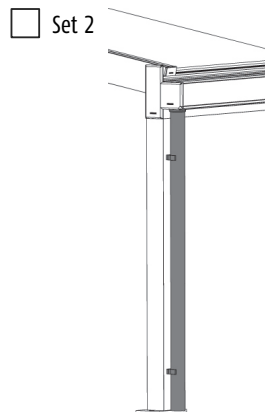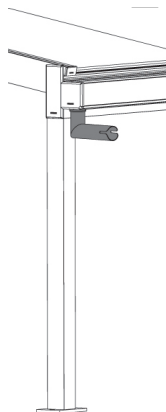

- Set 1 (Screw supports incl. seal, 180° spout, aluminium in roof colour)  
 Set 2 (Screw supports incl. seal, downpipe 2,500 mm, 2 clamp mounts, aluminium in roof colour)  
 Set 3 (Screw necks incl. seal, downpipe 2,500 mm, 87° pipe bend with outlet, 1 socket, 2 clamp mounts, aluminium in roof colour)

Aluminium covering panel in the roof colour for set 2 or 3

Position of drainage:  left  right  middle (only possible if there are 3 or more support)  
 (External view)

Lighting: \_\_\_\_\_ Part LED spots per light strip (please create a sketch for the distribution of the spots)  
 \_\_\_\_\_ Part Set of 6 LED recessed light "Altea" 3000K, 6 pc. Y-cabel 1,5m  
 30W transformer 24V DC, Set of 4 2m cabel  
 \_\_\_\_\_ Part Dimming controller  
 \_\_\_\_\_ Part 1-channel remote control  
 \_\_\_\_\_ Part 5-channel remote control with dimming control  
 \_\_\_\_\_ Part Set of 6 LED recessed light "Altea" 3000K  
 \_\_\_\_\_ Part Transformer DC 24V 30W  
 \_\_\_\_\_ Part Transformer 24V 100W

Cable duct wall connection:  yes  no

Accessory: \_\_\_\_\_ part Adapter for external shading  
 \_\_\_\_\_ part

#### Foundation elements:

front:  SF20  SF20 framed  SF25  SF25 framed  SF30  
 SF35  SF42  SF45

left:  SF20  SF20 framed  SF25  SF25 framed  SF30  
 SF35  SF42  SF45  Triangle glazing (roof light)

right:  SF20  SF20 framed  SF25  SF25 framed  SF30  
 SF35  SF42  SF45  Triangle glazing (roof light)

Please complete and send the corresponding order form!

---

Please add layout or elevation sketches and notes! (Note: use external view!)

