

☐ Inquiry   ☐ Order

Customer number: \_\_\_\_\_

Company stamp / address: \_\_\_\_\_

Contact person: \_\_\_\_\_

Telephone: \_\_\_\_\_

Quotation No.: \_\_\_\_\_

Commission: \_\_\_\_\_


Type of timber and finish: \_\_\_\_\_

Number of systems: \_\_\_\_\_

Opening direction:   ☐ inwards folding   ☐ outwards folding   (Note: Use interior view!)

Number of panel   \_\_\_\_\_ to the left   \_\_\_\_\_ to the right   (Please draw a floor plan or a view sketch for better understanding)

Dimensions:   Width: \_\_\_\_\_ (Total unfolding)   Height: \_\_\_\_\_ (incl. possible floor recession)

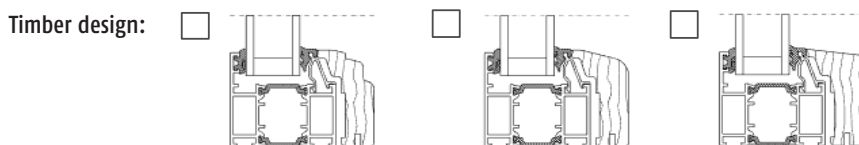

Colour:   ☐ RAL 7016   ☐ RAL 9006   ☐ RAL 9007   ☐ RAL 9016   ☐ E6-EV1   ☐ Special colour \_\_\_\_\_  
☐ Pre anodizing


Colour of hinges:   ☐ E6-EV1 powder   ☐ RAL 9011 mat   ☐ RAL 9016   ☐ Special colour \_\_\_\_\_

Handle colour:   ☐ E6-EV1 powder   ☐ RAL 9011 mat   ☐ RAL 9016   ☐ Special colour \_\_\_\_\_

Handle height:   H = \_\_\_\_\_ ☐ (Indicate handle height from lower panel edge)

Glazing:   ☐ Standard heat protection glass 2 x 4/20 SZR Ug 1.1  
☐ without glass: prepared for \_\_\_\_\_ mm  
☐ Special glass: \_\_\_\_\_ (Please indicate exact designation)

Floor connection:   ☐ with weathered bottom track



with flush bottom track (height incl. floor recession)



☐ with recessed bottom track and lowerable bottom door seal (height including recess)

Locking of turn panel:   ☐ Standard (shoot bolt lock operated from inside only)  
☐ Shoot bolt lock with PZ (operated from both sides)  
☐ Roller latch + 2 x dead lock + HEWI push handle  
☐ Anti-draft lock with mushroom head and 4 point locking, latch and profile cylinder (operable on both sides)  
☐ Pull handle for turn panel, outward folding system  
☐ other: \_\_\_\_\_

Additional safety:   ☐ Twin-Lock  
☐ WK2-Safety package

Please enclose floor plan resp. view sketch and remarks (please use inside view)