

BREAK

Design by Xucla & Alemany.

Reference

4101.

Application

Outdoor lamps

Installation type

Surface

Description

Outdoor bollard light designed by Xucla & Alemany. It gives a pleasant, subtle light through the methacrylate diffuser, and can withstand tough outdoor conditions. Available in khaki lacquer, oxide lacquer and concrete.

Diffuser

Polycarbonate diffuser

Materials

Box: Polyurethane

Base: Polyurethane

Diffuser: Methacrylate

Finish



4101-07 Khaki lacquer (RAL 7006)




4101-54 Oxide lacquer (RAL 8014)



4101-80 Concrete (Natural finish)

Sketch



Electrical characteristics

1 x LED 6,2W 350mA

Total 6.2 W



VIBIA



Led 2700K CRI >80 580 lm 94 lm/W

Fixture: 218 lm 35 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIM

Physical characteristics

1 Box / 0.88 x 0.35 x 0.34 m. / Vol. 0.1055 m³ /

Gross weight 12.0 kg. / Net weight 10.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Ground lighting

Reduced-height outdoor lamp to shade light on the ground.



Photometric data

Efficiency : 46.23%

Coordinate system : CG

Total flux : 1961.10

Maximum value : 320.25


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

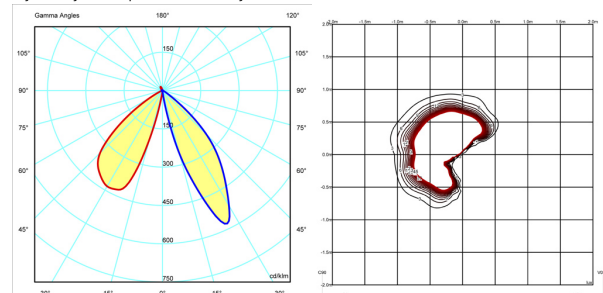

Certificates



